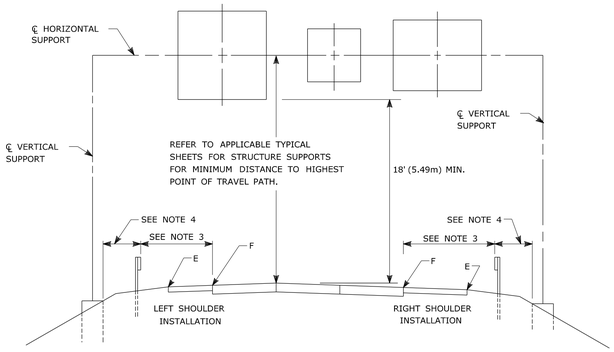

GUIDE RAIL PLACEMENT FOR SIGN SUPPORTS

NOTES:

1) FOR PLACEMENT OF CANTILEVER SIGN SUPPORT USE APPLICABLE PORTION OF ABOVE DETAIL.
2) BARRIER SYSTEM IS REQUIRED FOR BOTH SIDES OF MEDIAN SUPPORTS IN NARROW MEDIANS.
3) AT LOCATIONS WHERE IMPACT PROTECTION IS NOT REQUIRED FOR ROADSIDE ELEMENTS, FACE OF GUIDE RAIL SHALL BE PLACED 30' (9.1m) FROM EDGE OF TRAVELWAY.
4) OFFSETS OF FOUNDATIONS FROM BARRIER SYSTEMS SHALL BE AS SHOWN ELSEWHERE ON THE CONTRACT PLANS.
5) ALL SIGNS ARE TO BE HORIZONTAL, REGARDLESS OF CAMBER IN SUPPORT.

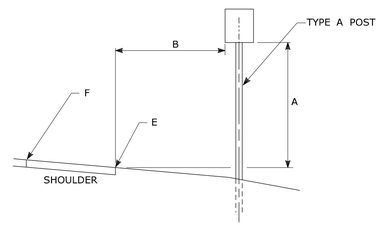

TYPICAL REGULATORY & WARNING SIGN PLACEMENT

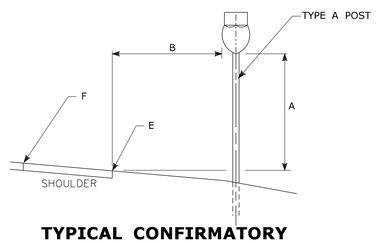

TYPICAL CONFIRMATORY ROUTE MARKER PLACEMENT

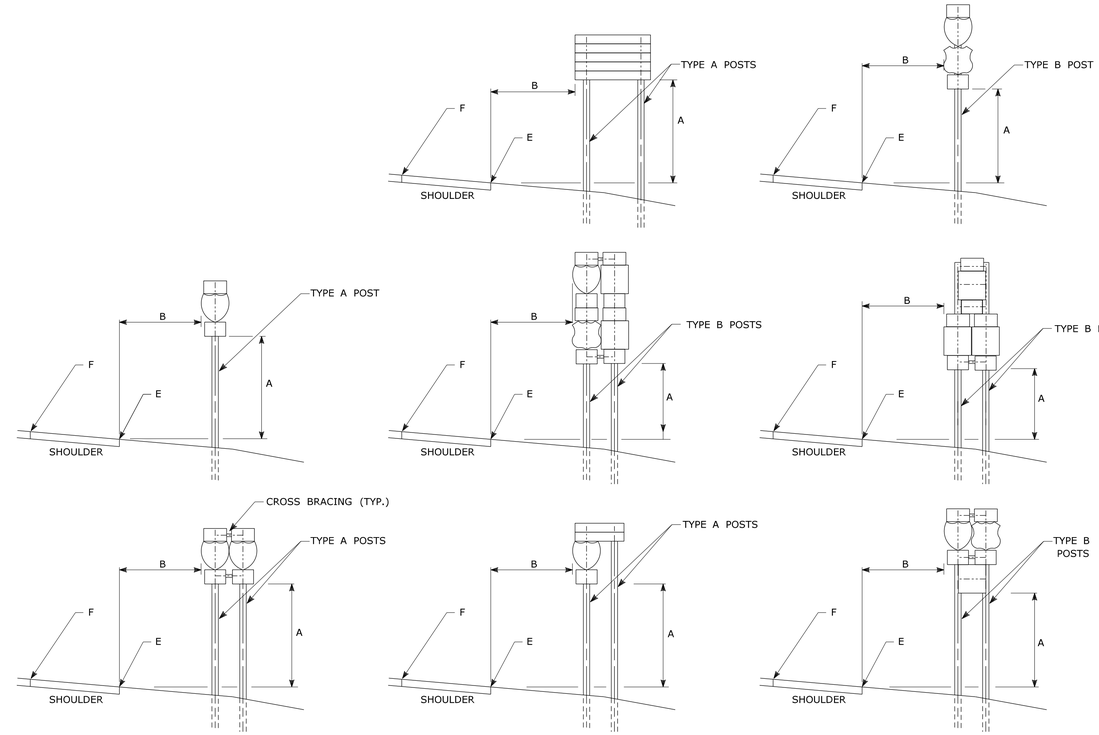

TYPICAL SIGN PLACEMENT AND POST SELECTION

NOTES:

ALL SIGNS AND SHIELDS ON DIRECTIONAL ASSEMBLIES SHALL ABUT VERTICALLY

2 POST ASSEMBLIES SHALL BE PROVIDED WITH 3" X ¼" (75 X 6) GALVANIZED STEEL BAR CROSS BRACING.

REFER TO TRAFFIC TYPICAL SHEET "TYPICAL METAL SIGN POSTS AND SIGN MOUNTING DETAILS" FOR SIGN POSTS.

DIM."A"	DIM."B" 1	ASSEMBLY LOCATION
7' (2.1m)	6' (1.8m) 12' (3.6m) 2	RURAL DISTRICTS & EXPRESSWAYS
7' (2.1m)	2' (0.6m)	BUSINESS & RESIDENTIAL DISTRICTS WHERE PARKING OR OTHER OBSTRUCTIONS LIMIT VISIBILITY
8'-6" (2.6m)	1' (0.3m)	SIDEWALKS 3

1 OR AS DIRECTED BY THE ENGINEER

2 6' FROM EDGE OF SHOULDER, WHEN SHOULDER IS OVER 6' WIDE
12' FROM EDGE OF TRAVELWAY, WHEN SHOULDER IS LESS THAN 6' WIDE.

3 A CLEAR PATH OF NOT LESS THAN 3 FT (0.9m) SHALL BE PROVIDED IN SIDEWALK AREAS.

"E" DENOTES EDGE OF SHOULDER OR FACE OF CURB

"F" DENOTES EDGE OF TRAVELWAY

FOR MAXIMUM EFFECTIVENESS AND TO ELIMINATE OR MINIMIZE GLARE, POSITION SIDE MOUNTED SIGNS ON STRUCTURAL STEEL BREAKAWAY SIGN SUPPORTS AS FOLLOWS:

ON A TANGENT SECTION, POSITION THE SIGN SO THE VERTICAL AXIS IS PLUMB AND THE HORIZONTAL AXIS IS AT AN ANGLE OF 93° WITH THE TRAFFIC LANE WHICH THE SIGN SERVES:



DIAGRAM "A"

ON A HORIZONTAL CURVE SECTION, POSITION THE SIGN SO THE VERTICAL AXIS IS PLUMB AND THE HORIZONTAL AXIS IS AT AN ANGLE OF 90° WITH A STRAIGHT LINE BETWEEN THE SIGN AND THE POINT AT WHICH THE SIGN SHALL BE READ.

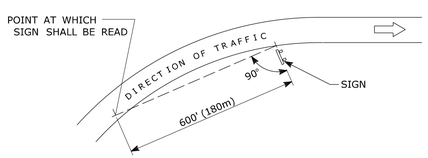

DIAGRAM "B"

SIGN ORIENTATION DETAILS

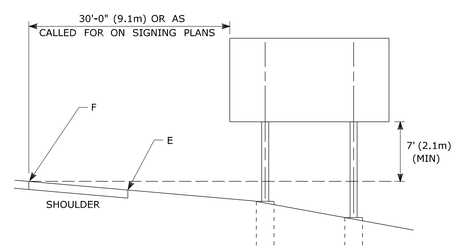

TYPICAL PLACEMENT OF SIDE MOUNTED SIGNS ON STRUCTURAL STEEL BREAKAWAY SIGN SUPPORTS

NOTES:

1) MIN. VERTICAL CLEARANCE ABOVE SIDEWALKS SHALL BE 8'-6" (2.6m).
2) WHERE GUIDE RAIL IS USED, THE OFFSET TO THE NEAR EDGE OF SIGN FACE SHALL BE AS SHOWN ELSEWHERE IN THE CONTRACT PLANS.
3) ON INTERSECTING ROADS AT RAMP TERMINI, THE OFFSET TO THE NEAR EDGE OF OF SIGN FACE SHALL BE 6' (1.8m) MIN. FROM POINT "E".
4) IF 30'-0" (9.1m) MIN. CANNOT BE MET, PLEASE CONTACT THE ENGINEER.

REV.	DATE	REVISION DESCRIPTION
1	2-2011	MINOR REVISIONS.

THE INFORMATION, INCLUDING ESTIMATED QUANTITIES OF WORK, SHOWN ON THESE SHEETS IS BASED ON LIMITED INVESTIGATIONS BY THE STATE AND IS IN NO WAY WARRANTED TO INDICATE THE CONDITIONS OF ACTUAL QUANTITIES OF WORK WHICH WILL BE REQUIRED.

Plotted Date: 2/16/2011

DIMENSIONS ARE IN ENGLISH (".") & METRIC UNITS (mm).
METRIC DIMENSIONS ARE ROUNDED:
- OVER 1" TO NEAREST 5 mm
- UNDER 1" TO NEAREST 1 mm.

NOT TO SCALE

STATE OF CONNECTICUT
DEPARTMENT OF TRANSPORTATION

Filename: CTDOT_TRAFFIC_STD.dgn Model: TR-1208_01

SUBMITTED BY: NAME/DATE/TIME: Charles S. Harlow 2011.02.22 11:09:17 -05'00'

APPROVED BY: NAME/DATE/TIME: John F. Carey 2011.03.02 09:19:01 -05'00'

CTDOT STANDARD SHEET

OFFICE OF ENGINEERING

STANDARD SHEET TITLE: SIGN SUPPORT & SIGN PLACEMENT DETAILS, GORE EXIT SIGN

STANDARD SHEET NO.: TR-1208_01