


P.W. 2109 NO.

DESCRIPTION

DATE

ENGINEERING OFFICE AT (860) 652-7735.

DANIEL A. PENNINGTON P.E. Reg. No. 20101

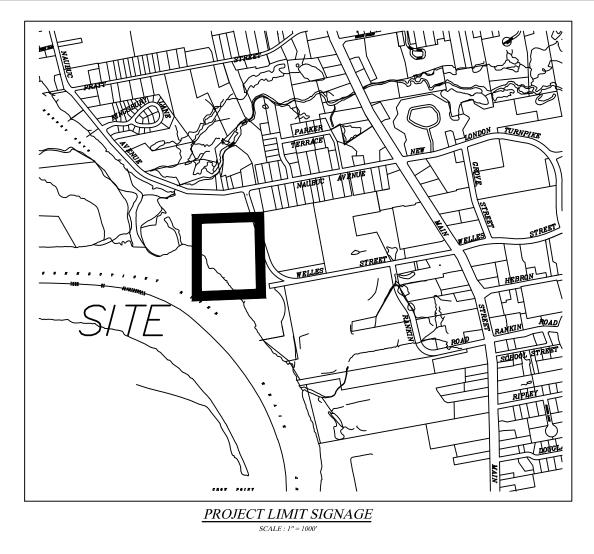

THIS PROJECT INVOLVES THE CONSTRUCTION OF A 136' X 64' BITUMINOUS PLAY SURFACE FOR PICKLEBALL WITH ASSOCIATED EXCAVATION AND STONE BASE MATERIAL CONSTRUCTION. DRAINAGE IMPROVEMENTS INCLUDE A PVC UNDERDRAIN SURROUNDING THE PLAY SURFACE, AND A STONE INFILTRATION TRENCH AND WATER QUALITY BASIN FOR WATER QUALITY IMPROVEMENT AS SHOWN ON THE ATTACHED PLANS. ELECTRICAL CONDUITS WILL ALSO BE INSTALLED TO SUPPORT FUTURE LIGHTING IMPROVEMENTS AS SHOWN ON THE PLANS. THE TOTAL AREA OF DISTURBANCE ASSOCIATED WITH THIS PROJECT

A PORTION OF THE PROJECT IS BEING CONSTRUCTED WITHIN THE 100 YEAR FLOOD ZONE OF THE CT RIVER WHICH IS THAT PORTION BELOW ELEVATION 27.8. THE GRADING FOR THE WATER QUALITY BASIN HAS BEEN DESIGNED TO OFFSET THE FILL ASSOCIATED WITH THE BITUMINOUS PLAYING SURFACE. GRADING SHALL BE PERFORMED AS PER THE APPROVED PLAN AND AS REQUIRED TO ENSURE THAT NO NET FILL OR LOSS OF FLOOD STORAGE WITH THE FLOOD ZONE

<u>PROJECT SPECIFIC SEDIMENTATION AND EROSION CONTROL PLAN</u> CONSTRUCTION ACTIVITIES OF CONCERN RELATIVE TO THE PROTECTION OF ADJACENT WETLANDS AND WATERCOURSES FROM SEDIMENTATION

1. DEWATERING: OPEN TRENCH EXCAVATIONS WILL NEED TO BE DEWATERED AS NECESSARY FOR PROPER INSTALLATION OF THE PROPOSED PIPES. IN THESE AREAS, ALL WATER REMOVED FROM THE TRENCH SHALL BE ADEQUATELY TREATED PRIOR TO DISCHARGE USING MEASURES DESCRIBED IN SECTION 5-13 OF THE 2002 CT GUIDELINES FOR EROSION AND SEDIMENT CONTROL. THIS MAY INCLUDE A STONE SUMP AND STANDPIPE FOR PUMP INTAKE PROTECTION, AND A DIRT BAG OR PUMPING SETTLING BASIN FOR TREATMENT OF THE PUMPED

2. STOCKPILING: EXCAVATED MATERIAL SHALL NOT BE STOCKPILED ADJACENT TO STORM DRAIN INLETS, WETLANDS, OR WATERCOURSES. WHEN IT IS NECESSARY BASED ON THE PROPOSED METHODS OF CONSTRUCTION TO STAGE EXCAVATED MATERIAL FOR SHOR DURATIONS IN THE VICINITY OF STORM DRAIN INLETS, THESE INLETS SHALL BE PROPERLY PROTECTED AS DESCRIBED ON THE PLANS. LONGER DURATION STOCKPILING OF MATERIAL, WHEN NECESSARY, SHALL BE ONLY IN LOCATIONS APPROVED IN ADVANCE BY THE ENGINEER, AND SUCH STOCKPILES SHALL BE RINGED WITH A

3. DISTURBED AREAS: LIMITS OF DISTURBANCE SHALL BE IN STRICT ACCORDANCE WITH THE APPROVED PLAN. ALL AREAS DISTURBED BY CONSTRUCTION SHALL BE STABILIZED WITH THE FINAL SURFACE TREATMENT AS SOON AS POSSIBLE AFTER CONSTRUCTION ACTIVITIES ARE COMPLETED. DISTURBED AREAS WITH STEEP OR LONG SLOPES AND OTHER AREAS WITH SIGNIFICANT POTENTIAL FOR CAUSING SEDIMENTATION SHALL BE PROTECTED WITH TEMPORARY STRAW MULCH, WOOD CHIPS, EROSION CONTROL MATTING, OR OTHER SUITABLE MATERIALS PRIOR TO SIGNIFICANT FORECASTED RAIN STORM

4. TRAVEL AREAS: THE EXISTING STONE ACCESS ROAD SURROUNDING THE PORJECT SITE SHALL BE USED FOR CONSTRUCTION ACCESS TO THE WORK AREA TO PREVENT SOIL FROM BEING TRACKED OUT INTO

5. SEVERE WEATHER CONTINGENCY PLAN: IN ADVANCE OF A SEVERE WEATHER EVENT, ALL EROSION CONTROLS DESCRIBED ABOVE AND ELSEWHERE ON THE PLANS SHALL BE INSPECTED AND ADJUSTED AS

RESPONSIBLE FOR IMPLEMENTING THE EROSION AND SEDIMENTATION CONTROL PLAN. THIS INCLUDES THE INSTALLATION AND MAINTENANCE OF ALL CONTROL MEASURES, INFORMING ALL PARTIES ENGAGED ON THE CONSTRUCTION SITE OF THE REQUIREMENTS AND

GENERAL SEDIMENTATION AND EROSION CONTROL REQUIREMENTS:

THESE GUIDELINES SHALL APPLY TO ALL WORK CONSISTING OF ANY AND ALL TEMPORARY AND/OR PERMANENT MEASURES TO CONTROL WATER POLLUTION AND SOIL EROSION AS MAY BE REQUIRED, DURING THE CONSTRUCTION OF THE PROJECT.

IN GENERAL, ALL ACTIVITIES SHALL PROCEED IN SUCH A MANNER SO AS NOT TO POLLUTE ANY WETLANDS, WATERCOURSE, WATERBODY, AND CONDUIT CARRYING WATER, ETC. THE DEPARTMENT OF PHYSICAL SERVICES SHALL LIMIT, INSOFAR AS POSSIBLE, THE SURFACE AREA OF EARTH MATERIALS EXPOSED BY CONSTRUCTION METHODS, AND IMMEDIATELY PROVIDE PERMANENT AND TEMPORARY POLLUTION CONTROL MEASURES TO PREVENT CONTAMINATION OF ADJACENT WETLANDS, WATERCOURSES AND WATERBODIES, AND TO PREVENT, INSOFAR AS POSSIBLE, EROSION ON THE SITE.

CONSTRUCTION METHODS, IN GENERAL, SHALL BE IN ACCORDANCE WITH THE PROVISIONS SET FORTH IN THE "GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL" (2002) BY THE STATE OF CONNECTICUT COUNCIL ON SOIL AND WATER CONSERVATION.

- ALL CONTROL MEASURES SHALL BE INSTALLED AS NOTED ABOVE AND AS SHOWN ON THE PLANS.
- 2. ALL CONTROL MEASURES SHALL BE INSPECTED AND APPROVED BY THE ENGINEER PRIOR TO COMMENCEMENT OF ANY WORK, INCLUDING PRE-CONSTRUCTION CLEARING AND GRUBBING.
- ALL CONTROL MEASURES SHALL BE MAINTAINED AND UPGRADED AS REQUIRED TO ACHIEVE PROPER SEDIMENT CONTROL THROUGHOUT THE CONSTRUCTION PERIOD AND UNTIL DISTURBED

AREAS HAVE BEEN THOROUGHLY STABILIZED.

- NO CONTROL MEASURES SHALL BE REMOVED WITHOUT APPROVAL FROM THE ENGINEER.
- ADDITIONAL CONTROL MEASURES SHALL BE INSTALLED DURING THE CONSTRUCTION PERIOD IF DEEMED NECESSARY BY THE
- 6. THE LIMITS OF CLEARING, GRADING AND DISTURBANCE, AS SHOWN ON THE PLAN(S). SHALL BE KEPT TO A MINIMUM WITHIN THE APPROVED AREA OF CONSTRUCTION. ALL AREAS OUTSIDE THE LIMITS OF CLEARING SHALL REMAIN TOTALLY INDISTURBED.
- ANY CONTROL MEASURES RETAINING SEDIMENT OVER 1/2 THEIR HEIGHT SHALL HAVE THE SEDIMENT IMMEDIATELY REMÓVED, AND ALL DAMAGED CONTROL MEASURES SHALL BE REMOVED AND
- ALL NEW AND EXISTING CATCH BASINS LOCATED WITHIN THE PROJECT LIMITS SHALL BE PROTECTED WITH A SEDIMENTATION CONTROL SYSTEM IN GRASSED AREAS OR WITH A SEDIMENTATION CONTROL SACK IN PAVED AREAS UNTIL ALL DISTURBED AREAS HAVE BEEN THOROUGHLY STABILIZED.
- SEDIMENT REMOVED FROM CONTROL MEASURES AND DRAINAGE FACILITIES SHALL BE DISPOSED OF IN A MANNER THAT IS CONSISTENT WITH STATE AND LOCAL REGULATIONS.
- 10. THE PLANTING SEASONS FOR THE SPECIFIED SEED MIXTURE SHALL BE AS DEFINED IN THE 2002 CONNECTICUT GUIDELINES FOR SOIL EROSION AND SEDIMENT CONTROL, UNLESS DIRECTED OTHERWISE BY THE TOWN ENVIRONMENTAL PLANNER. OUTSIDE OF THESE SPECIFIED DATES, AREAS WILL BE STABILIZED WITH HAYBALE CHECK DAMS, FILTER FABRIC, OR WOODCHIP MULCH AS REQUIRED TO CONTROL EROSION.

MAINTENANCE PLAN FOR STORMWATER FACILITIES:

GENERAL: THE PROPOSED DRAINAGE SYSTEM TO BE INSTALLED AS PART OF THIS PROJECT WILL REQUIRE ROUTINE MAINTENANCE IN ORDER TO MAINTAIN PROPER FUNCTION OF WATER QUALITY IMPROVEMENT FEATURES. THESE FEATURES INCLUDE THE WATER QUALITY BASIN AND INFILTRATION TRENCH. THE TOWN OF GLASTONBURY HIGHWAY DEPARTMENT WILL BE RESPONSIBLE FOR MAINTENANCE OF ALL COMPONENTS OF THE PROPOSED

WATER QUALITY BASIN: WATER QUALITY BASIN WILL BE MOWED AS NECESSARY TO PREVENT WOODY VEGETATIVE GROWTH WHICH WOULD INHIBIT FUNCTION. BASIN WILL BE INSPECTED ANNUALLY FOR SIGNS OF SEDIMENT DEPOSITS OR EROSION AND CLEANED AS


INFILTRATION TRENCH: SURFICIAL STONE OF INFILTRATION TRENCH SHALL BE KEPT FREE OF DEBRIS AND ORGANIC MATERIAL THAT WOULD INHIBIT THE FLOW OF SURFACE WATER INTO THE TRENCH. GRASS CLIPPING AND LEAF DEBRIS SHALL BE COLLECTED OR BLOWN OFF FROM THE SURFACE OF THE TRENCH DURING ROUTINE MOWING AND LEAF REMOVAL OPERATIONS TO


MANUAL REVISIONS TO THIS DOCUMENT ARE PROHIBITED. ALL REVISIONS MUST BE PERFORMED ON CADD FILE SHOW! IN THE LEFT MARCIN. IF THERE ARE ANY DISCREPANCIES OR QUESTIONS, CONTACT THE TOWN OF GLASTONBURY,

PLANS DEPICTING PICKLEBALL COURTS LOCATED AT RIVERFRONT COMMUNITY CENTER 300 WELLES STREET GLASTONBURY, CONNECTICUT

SHEET NO

OF <u>2</u>

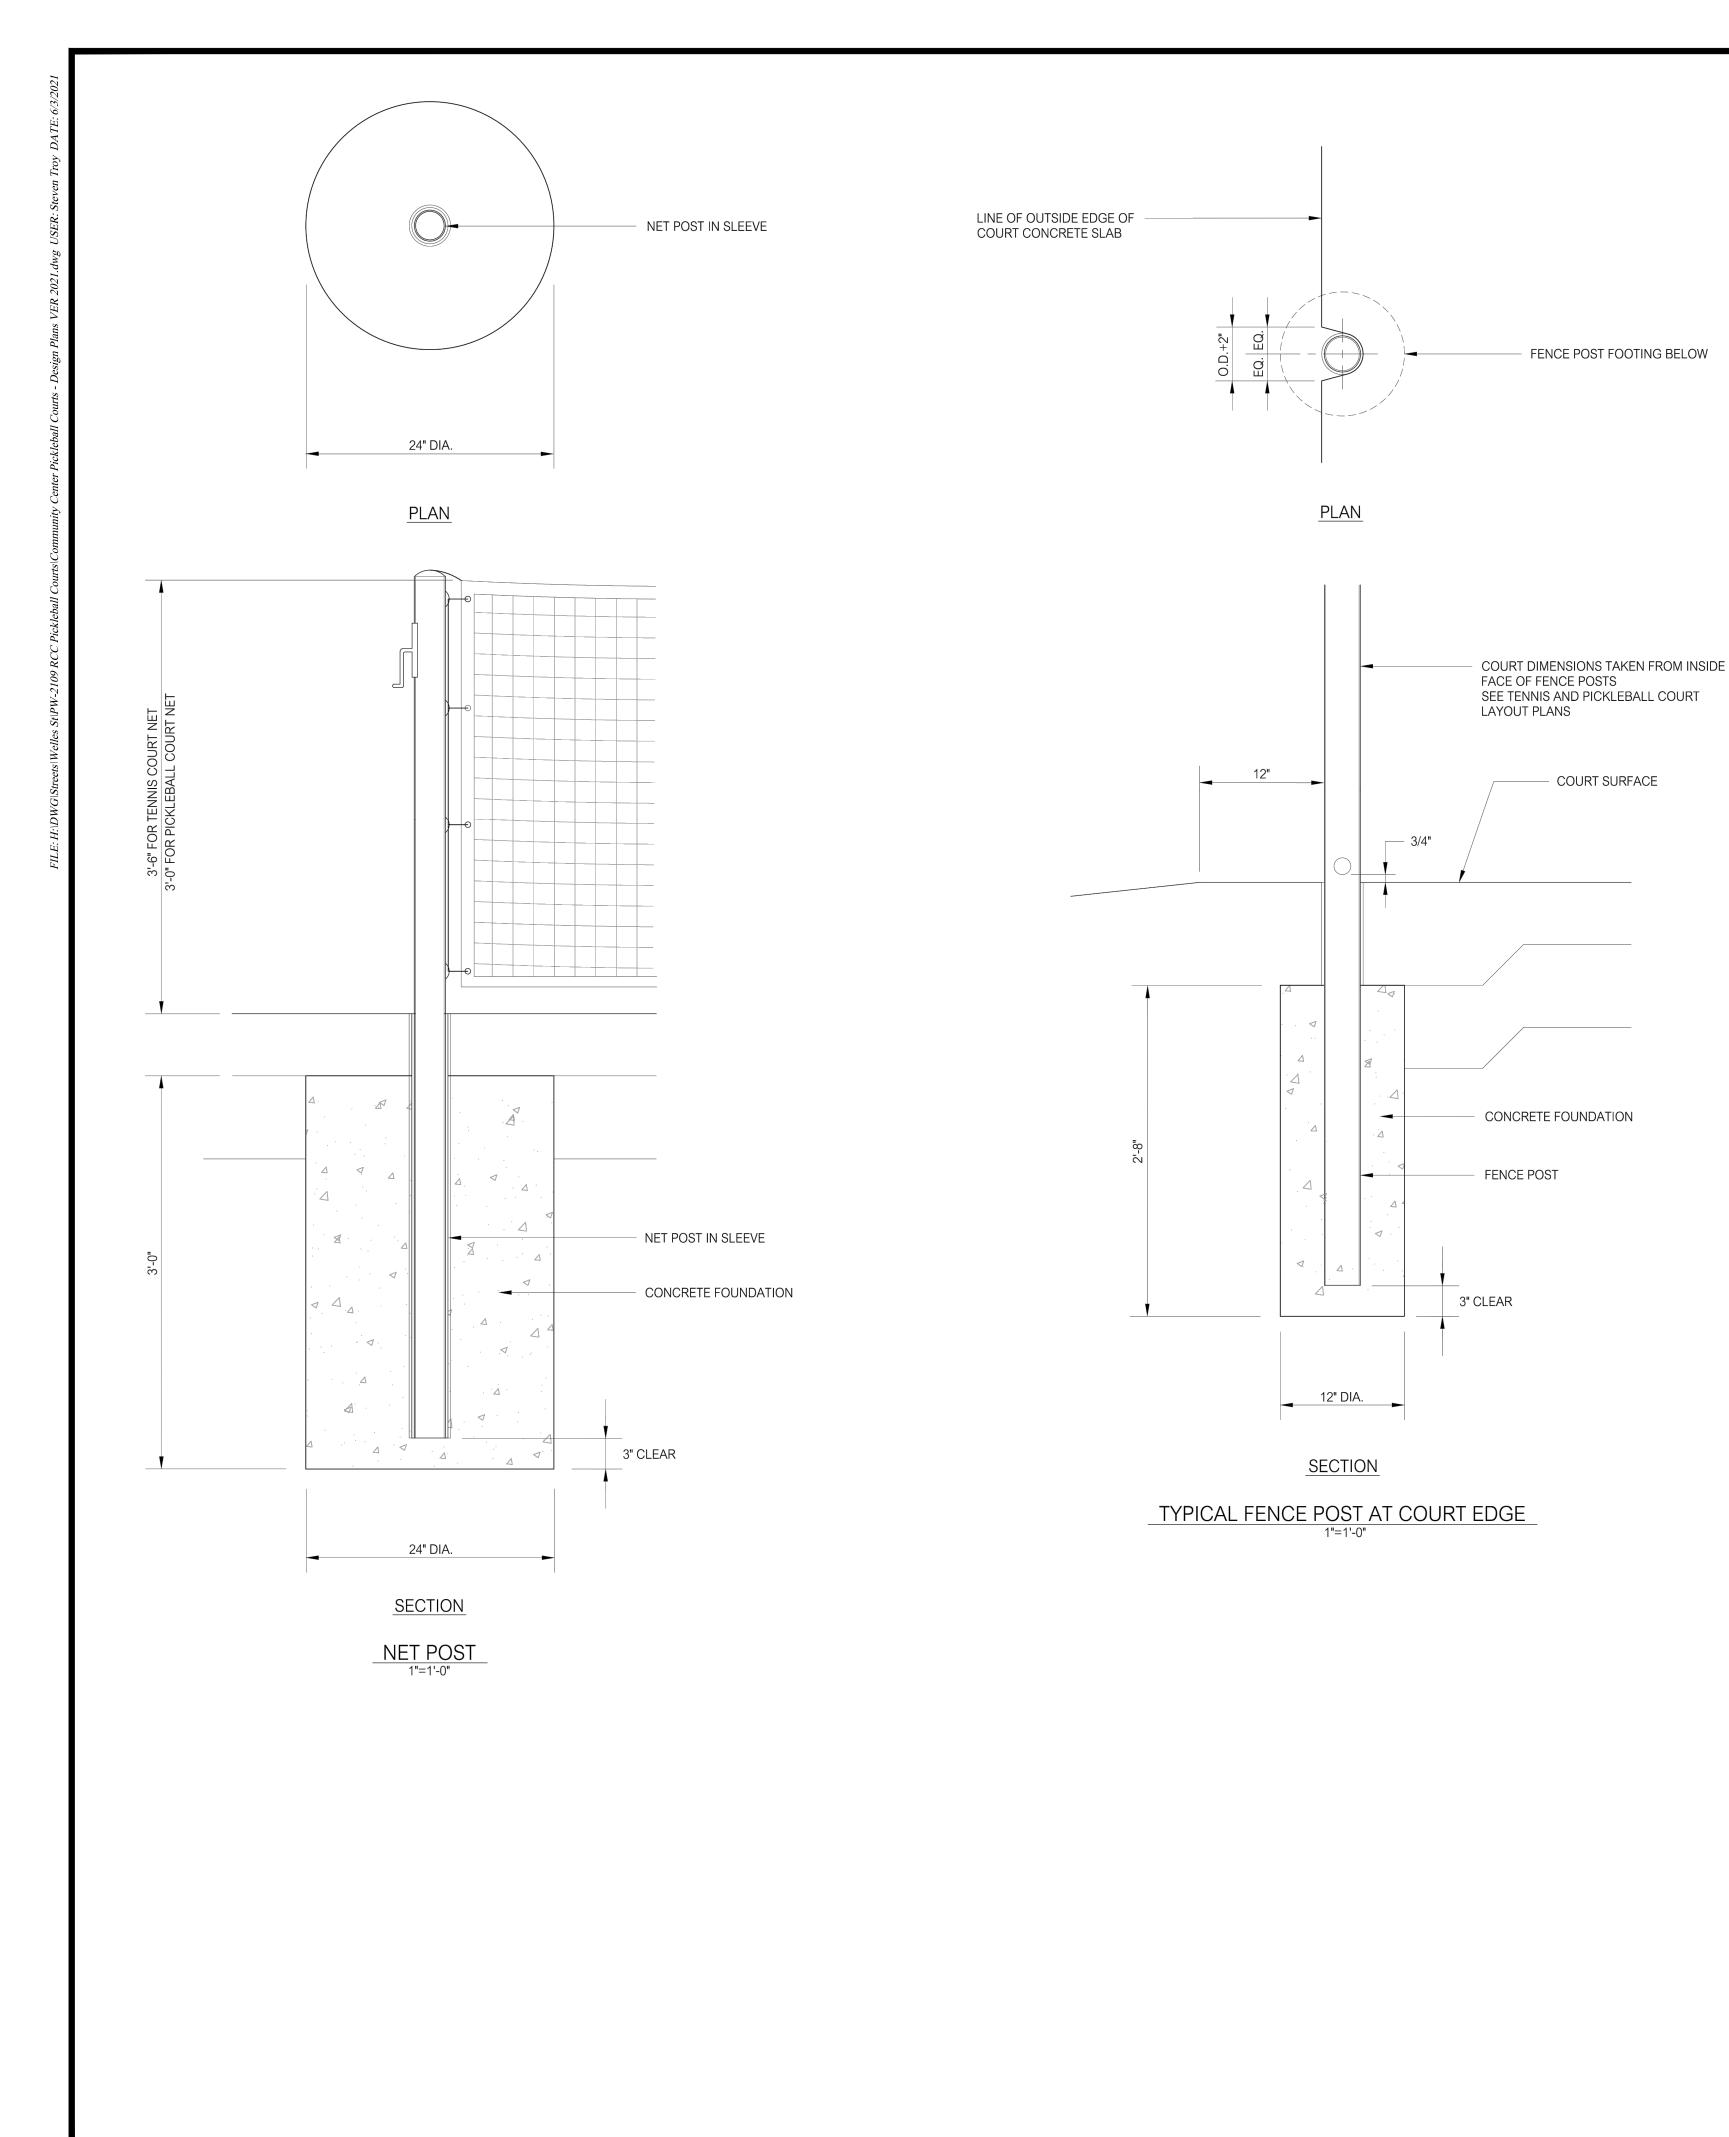


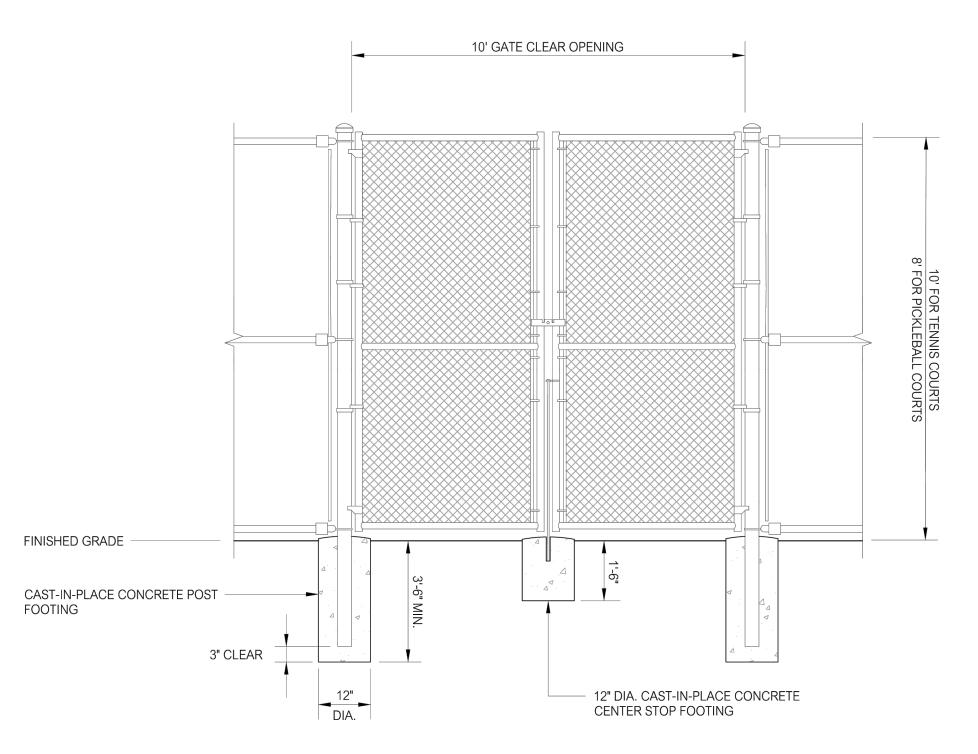

ELEVATION

DOUBLE LEAF CHAIN LINK FENCE SWING GATE NOT TO SCALE

- 1. CHAIN LINK FABRIC, POSTS, RAILS, FITTINGS AND FASTENERS SHALL BE POLYVINYL CHLORIDE (PVC) COATED, COLOR-BLACK.
- 2. PROVIDE GATE LATCH AND ARRANGE FOR PADLOCK AT ALL GATE LOCATIONS.

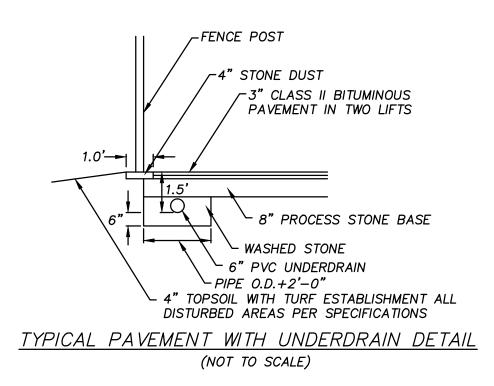

DRAWING ISSUE STATUS SCALE: AS SHOWN DRAWN BY: S.Troy CHECKED BY: S.M.B. APPROVED BY: D.A.P. ST. FILE: MANUAL REVISIONS TO THIS DOCUMENT ARE PROHIBITED.
ALL REVISIONS MUST BE PERFORMED ON CADD FILE SHOWN
IN THE LEFT MARGIN. IF THERE ARE ANY DISCREPANCIES
OR QUESTIONS, CONTACT THE TOWN OF GLASTONBURY,
ENGINEERING OFFICE AT (860) 652-7735.

DATE

DESCRIPTION



DETAILS DEPICTING PICKLEBALL COURTS 300 WELLES STREET GLASTONBURY, CONNECTICUT SHEET NO.

OF <u>2</u>